

Third Semester B.E. Degree Examination, July/August 2022
Mechanics of Materials

Time: 3 hrs.

Max. Marks: 100


Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. State the Hooke's law. Explain with neat sketch stress-strain diagram for mild steel indicating its salient points. (10 Marks)
- b. The following data refers to a mild steel specimen tested in a laboratory.
 Diameter of specimen = 25 mm Gauge length of specimen = 200 mm
 Extension under a load of 20 kN = 0.04 mm Load at yield point = 150 kN
 Maximum load = 225 kN Length of specimen after failure = 275 mm
 Neck diameter = 18.25 mm
 Determine: (i) Young's modulus (ii) Yield stress (iii) Ultimate stress
 (iv) Percentage of elongation (v) Percentage reduction in area (10 Marks)

OR

- 2 a. Obtain the relation between modulus of elasticity and modulus of rigidity. (10 Marks)
- b. A steel rod of cross sectional area 1600 mm^2 and two brass rods each of cross sectional area of 1000 mm^2 together support a load of 50 kN as shown in Fig.Q2(b). Find stresses in the rods.

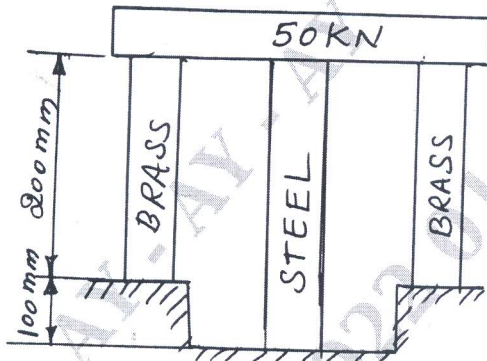

$$E_{\text{steel}} = 2 \times 10^5 \text{ N/mm}^2$$

$$E_{\text{brass}} = 1 \times 10^5 \text{ N/mm}^2$$

Fig.Q2(b)

(10 Marks)

Module-2

- 3 a. Describe the construction of Mohr's circle for plane stress condition. (10 Marks)
- b. The principal stresses at a point in a bar are 200 N/mm^2 (Tensile) and 100 N/mm^2 (compressive). Determine the resultant stress in magnitude and direction on a plane inclined at 60° to the axis of major principal stress. Also determine the maximum intensity of shear stress in the material at the point. (10 Marks)

OR

- 4 a. Derive an expression for circumferential and longitudinal stress of thin cylinder. (10 Marks)
- b. A pipe of 500 mm internal diameter and 75 mm thick is filled with a fluid at a pressure of 6 N/mm^2 . Find the maximum and minimum hoop stress across the cross-section of the cylinder. Also sketch the radial pressure and hoop stress distribution across the section. (10 Marks)

Module-3

- 5 a. Define a beam. Explain the different types of beams and types of loads with neat sketches. (08 Marks)
- b. A simply supported beam of span 6 m is subjected to a concentrated load of 25 kN acting at a distance of 2 m from the left end. Also subjected to an uniformly distributed load of 10 kN/m over the entire span. Draw the SFD and BMD. (12 Marks)

OR

- 6 a. With assumptions in simple bending, derive an expression $\frac{M}{I} = \frac{\sigma}{y} = \frac{E}{R}$ with usual notations. (10 Marks)
- b. Derive an expression for $M = EI \frac{d^2y}{dx^2}$. (10 Marks)

Module-4

- 7 a. Derive an expression $\frac{T}{J} = \frac{\tau}{R} = \frac{G\theta}{\ell}$ with usual notations. (10 Marks)
- b. A hollow circular steel shaft has to transmit 60 KW at 210 rpm such that the maximum shear stress does not exceed 60 MN/m², if the ratio of internal to external diameter is equal to $\frac{3}{4}$ and the value of rigidity modulus is 84 GPa, find the dimensions of the shaft and angle of twist in a length of 3 m. (10 Marks)

OR

- 8 a. Derive an expression for Euler's crippling load for a column when both ends are hinged. (10 Marks)
- b. A 1.5 m long column has a circular cross section of 50 mm diameter. One end of the column is fixed in direction and position and the other end is free. Taking the FoS = 3, calculate the safe load using:
- (i) Rankine's formula taking yield stress 560 N/mm² and $\alpha = \frac{1}{1600}$.
- (ii) Euler's formula, taking $E = 1.2 \times 10^5$ N/mm². (10 Marks)

Module-5

- 9 a. Derive an expression for strain energy due to normal stress. (10 Marks)
- b. A tensile load of 50 kN is applied to a circular cross-section bar of diameter 50 mm and 4 m long, if $E = 2 \times 10^5$ N/mm², determine:
- (i) Stretch in the rod
- (ii) Stress in the rod
- (iii) Strain energy absorbed by the rod in
- load is applied gradually
 - load is applied suddenly. (10 Marks)

OR

- 10 a. Write notes on : (i) Maximum shear stress theory (ii) Maximum principal stress theory. (10 Marks)
- b. A plate of C45 steel ($\sigma_{yt} = 353$ MPa) is subjected to the following stresses: $\sigma_x = 150$ N/mm², $\sigma_y = 100$ N/mm² and $\tau_{xy} = 50$ N/mm². Find the factor of safety by:
- (i) maximum principal stress theory (ii) maximum shear stress theory (10 Marks)
