



USN

--	--	--	--	--	--	--	--

## Second Semester B. Arch. Degree Examination, June/July 2024 Building Structure – II

Time: 3 hrs.

Max. Marks: 100

**Note: Answer any FIVE full questions, choosing ONE full question from each module.**

### Module-1

- 1 a. Explain stress strain curve for mild steel. (10 Marks)
- b. A rod of 150mm long and of diameter 2cm is subjected to an axial pull of 20kN. If the modulus of elasticity of the material of the rod is  $2 \times 10^5 \text{N/mm}^2$ , determine: i) stress ii) the strain iii) the elongation of rod. (10 Marks)

OR

- 2 a. Define the following : (06 Marks)  
 i) stress ii) strain iii) Hooke's law.
- b. A tensile test was conducted on a mild steel bar. The following data was obtained from the text.  
 i) Diameter of steel bar = 3cm  
 ii) Gauge length of the bar = 20cm  
 iii) Load at elastic limit = 250kN  
 iv) Extension at a load of 175kN = 0.21mm  
 v) Max load = 380kN  
 vi) Diameter of rod at failure = 2.25cm.  
 Determine : i) Young's modulus ii) Stress at elastic limit iii) Percentage elongation  
 iv) Percentage decrease in area. (14 Marks)

### Module-2

- 3 a. Explain BMD and SFD diagram. (05 Marks)
- b. Define point of contra flexure, point of contra shear. (05 Marks)
- c. A cantilever beam is subjected to point loads as shown in Fig Q3(c). Draw SFD and BMD.

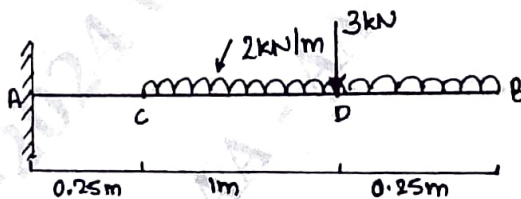


Fig Q3(c)

(10 Marks)

OR

- 4 a. Derive the relationship between load intensity, shear force, bending moment. (10 Marks)
- b. A simply supported beam is subjected to loads as shown Fig Q4(b). Draw SFD and BMD.

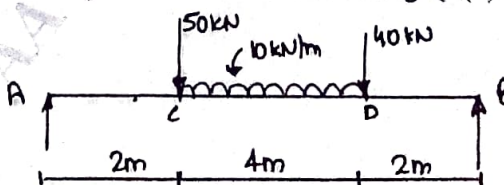


Fig Q4(b)

(10 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
2. Any revealing of identification, appeal to evaluator and /or equations written eg, 42+8 = 50, will be treated as malpractice.

Module-3

- 5 a. List the assumption made in Bending theory. (10 Marks)  
 b. The shear force acting on a section of a beam is 50kN. The section of the beam is a T-shaped of dimensions 100mm × 100mm × 20mm as shown in Fig Q5(b). The moment of inertia about the horizontal neutral axis is  $314.221 \times 10^4 \text{mm}^4$ . Calculate the shear at the neutral axis and at the junction of the web and the flange.

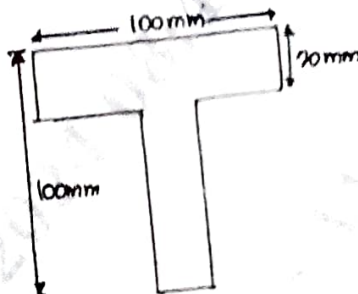


Fig Q5(b)

(10 Marks)

OR

- 6 a. Explain theory of simple bending (06 Marks)  
 b. An I section beam of 150mm × 400mm has a web thickness of 10mm and a flange thickness of 25mm of the shear force acting on the section in 40kN. Sketch the shear stress distribution across the section.

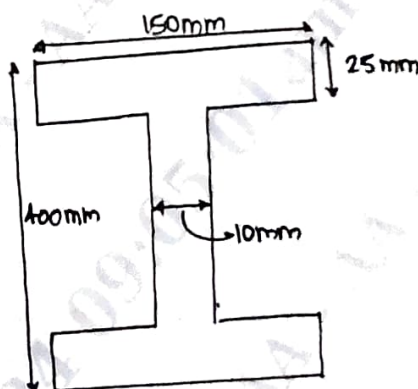


Fig Q6(b)

(14 Marks)

Module-4

- 7 a. List the assumption made in Euler's theory of column. (04 Marks)  
 b. Define what is short column and a long column. (06 Marks)  
 c. A solid round bar 3m long and 5cm in diameter is used as a strut with both ends hinged. Determine the crippling load. Take  $E = 2 \times 10^5 \text{N/mm}^2$ . Also find the crippling load when both side are fixed. (10 Marks)

OR

- 8 a. Write expression for crippling load  
 i) One end fixed other end hinged  
 ii) Both ends fixed  
 iii) One end fixed and other pin jointed  
 iv) Both ends hinged.

(04 Marks)

- b. Define : i) Crushing load ii) Crippling load. (04 Marks)
- c. A hollow alloy tube 4m long with external and internal diameter of 40mm and 25mm respectively was found to extend 4.8mm under a tensile load of 60kN. Find the buckling load for the tube with both ends pinned. Also find the safe load on the tube, taking a factor of safety of 5. (12 Marks)

**Module-5**

- 9 a. List the assumption made in deriving equations for moment curvature relationship. (04 Marks)
- b. Define i) Deflection ii) Slope iii) Deflection curve. (06 Marks)
- c. A rectangular beam 300mm deep is simply supported over a span of 4m. Determine the UDL which the beam may carry if the bending stress shall not exceed  $120\text{N/mm}^2$ . Take  $I = 8 \times 10^6\text{mm}^4$ . (10 Marks)

**OR**

- 10 a. A beam of uniform rectangular section 200mm wide and 300mm deep is simply supported at its ends. If carries a uniformly distributed load of  $9\text{kN/m}$  run over the entire span of 5m. If the value of  $E$  is  $1 \times 10^4\text{N/mm}^2$ , find : i) the slope at the support ii) max deflection. (12 Marks)
- b. A beam 4m long, simply supported at its ends, carries a point load  $W$  at its centre. If the slope at the ends of the beam is not to exceed  $1^\circ$ , find the deflection at the centre of the beam. (08 Marks)

\* \* \* \* \*