

Sixth Semester B.E. Degree Examination, Feb./Mar. 2022 Control System

Time: 3 hrs.

Max. Marks: 80

Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. Define open loop and closed loop control system, mention any four differences between open loop and closed loop control system. (08 Marks)
- b. For the mechanical system shown in Fig.Q.1(b). Draw the mechanical network and write the force voltage analogous electric network. (08 Marks)

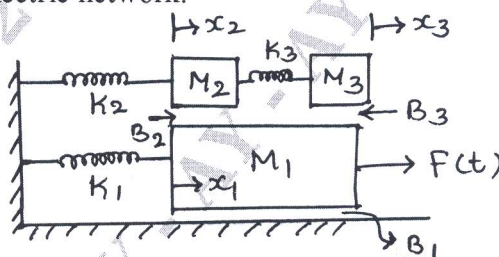


Fig.Q.1(b)

OR

- 2 a. Derive the transfer function of field control DC servomotor. (08 Marks)
- b. Draw the Electrical networks based on torque current analogy give all the performance equation for the Fig.Q.2(b). (08 Marks)

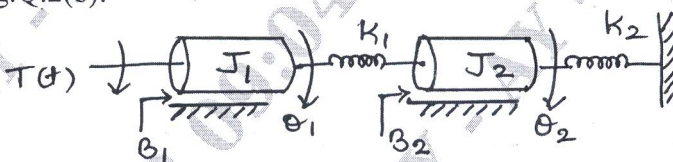


Fig.Q.2(b)

Module-2

- 3 a. Illustrate how to perform the following connection with block diagram reduction technique
 - i) Blocks in parallel
 - ii) Shifting summing point behind the block
 (04 Marks)
- b. Find $\frac{C(S)}{R(S)}$ by Mason's gain formula. (06 Marks)

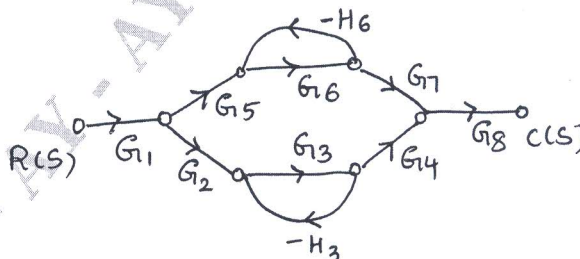


Fig.Q.3(a)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.
2. Any revealing of identification, appeal to evaluator and/or equations written eg, 42+8 = 50, will be treated as malpractice.

(06 Marks)

- c. Obtain $C(S)/R(S)$ using block diagram reduction rule.

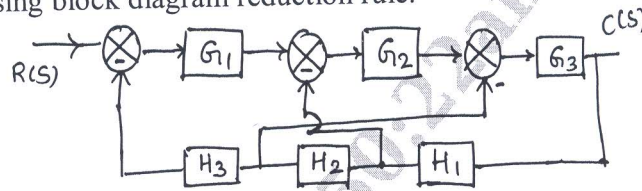


Fig. Q.3(c)

OR

- 4 a. Obtain the transfer function for the block diagram shown in Fig. Q.4(a). Using block diagram reduction technique. (08 Marks)

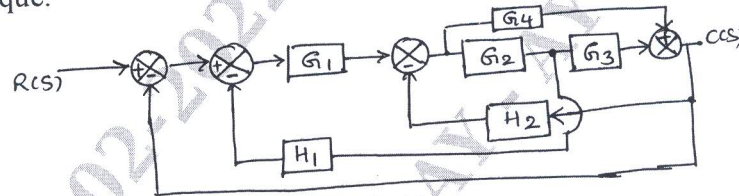


Fig. Q.4(a)

- b. Find the transfer function for the given network. Using signal flow graph methods. (08 Marks)

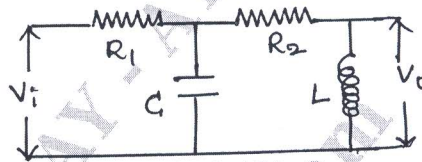


Fig. Q.4(b)

Module-3

- 5 a. Derive the time domain specification i) Peak time (T_p) ii) Rise time (T_r) (06 Marks)
 b. What are necessary and sufficient condition for the system to be stable as for RH criteria? (04 Marks)
 c. Comment on stability using Routh criteria of characteristic equation is $S^5 + 2S^4 + 3S^3 + 4S^2 + 5S + 6 = 0$. (06 Marks)

OR

- 6 a. A given system oscillate with frequency 2rad/sec , find the value of K_{mar} and 'P' number of pole are in RHS. (08 Marks)

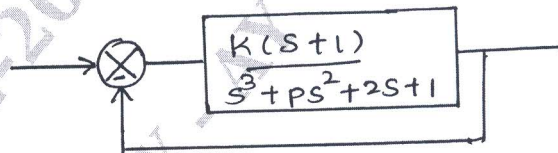


Fig. Q.6(a)

- b. For the control system shown in Fig. Q.6(b), find the value of K_1 and K_2 so that $M_p = 25\%$ and $T_p = 4\text{sec}$. Assume unit step input. (08 Marks)

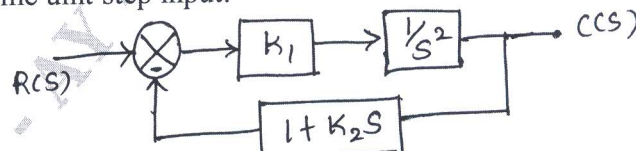


Fig. Q.6(b)

Module-4

- 7 a. The open loop transfer function of a control system is given by

$$G(S) = \frac{K}{S(S+2)(S^2+6S+25)}$$

Sketch the complete root locus as K varied from zero to infinity. (12 Marks)

- b. Define the following with respect to frequency response specification:

- Resonant peak
 - Gain cross over frequency
 - Phase cross over frequency.
- (04 Marks)

OR

- 8 a. A unity feedback control system has $G(S) = \frac{80}{S(S+2)(S+20)}$. Draw the bode plot. (12 Marks)

Determine GM, PM, W_{gc} and W_{pc} comment on stability.

- b. For a single loop unity feedback system the open loop transfer function is given by

$$G(S) = \frac{K(S+2)(S+3)}{S(S+1)}$$

show that the complex part of root locus is a circle identify its centre and radius. (04 Marks)

Module-5

- 9 a. Explain Nyquist stability criteria. (06 Marks)
- b. Explain step by step procedure to design lag compensation network. (10 Marks)

OR

- 10 a. The open loop transfer function of unity negative feedback system is given by

$$G(S) = \frac{K(S+3)}{S(S^2+2S+2)}$$

using the Nyquist criteria. Find the value of K for which the closed loop system is just stable. (08 Marks)

- b. Explain the effect of PD and PI controller on the performance of second order system. (05 Marks)

- c. Write a note on encirclement of a point. (03 Marks)
