

CBCS SCHEME

USN

--	--	--	--	--	--	--	--	--	--

15ME73

Seventh Semester B.E. Degree Examination, Dec.2018/Jan.2019 Control Engineering

Time: 3 hrs.

Max. Marks: 80

Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. Define control system. Explain open and closed loop control systems with examples. (08 Marks)
- b. With block diagram, explain:
 - i) Proportional controller
 - ii) Integral controller
 - iii) Proportional plus differential controller. (08 Marks)

OR

- 2 a. List the advantages and disadvantages of open loop and closed loop control system. (08 Marks)
- b. Explain requirements of automatic control system. (08 Marks)

Module-2

- 3 a. Obtain differential equation and hence get transfer function for mechanical system shown in Fig.Q.3(a). (08 Marks)

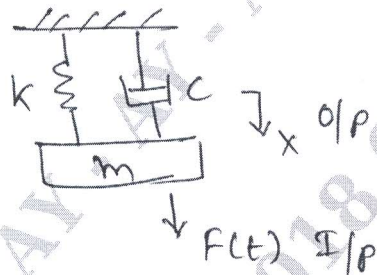


Fig.Q.3(a)

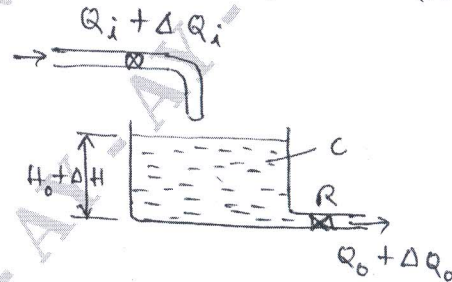


Fig.Q.3(b)

- b. Obtain transfer function of liquid level control system shown in Fig.Q.3(b). (08 Marks)

OR

- 4 a. Obtain the overall transfer function for the block diagram shown in Fig.Q.4(a). (08 Marks)

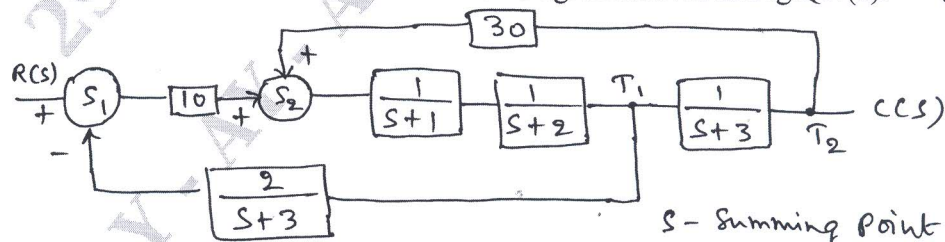


Fig.Q.4(a)

S - Summing point
T - Take off point

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.
2. Any revealing of identification, appeal to evaluator and/or equations written eg, 42+8 = 50, will be treated as malpractice.

- b. Find the transfer function for the signal flow graph shown in Fig.Q.4(b) by using Mason's gain formula. (08 Marks)

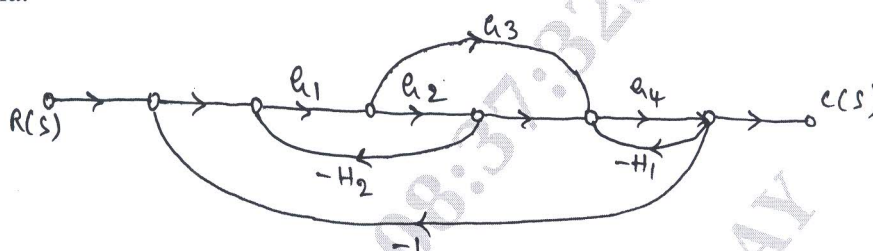


Fig.Q.4(b)

Module-3

- 5 a. A unity feed back system has $G(s) = \frac{40(s+2)}{s(s+1)(s+4)}$. Determine: i) Type of system
ii) All error coefficients iii) Error for ramp input with magnitude 4. (08 Marks)
- b. The time response of a second order system for unit step input is $c(t) = 1 + 0.2e^{-60t} - 1.2e^{-10t}$. Determine: i) Closed loop transfer function ii) Undamped natural frequency and damping ratio. (08 Marks)

OR

- 6 Sketch the root locus for the system with
 $G(s)H(s) = \frac{K(s+4)}{s(s^2 + 2s + 2)}$. (16 Marks)

Module-4

- 7 Draw the Bode plot for a system having
 $G(s)H(s) = \frac{100}{s(s+1)(s+2)}$
Find: i) Gain margin ii) Phase margin iii) Gain crossover frequency
iv) Phase cross over frequency. (16 Marks)

OR

- 8 a. Draw the polar plot and ascertain the nature of stability for OLTF.
 $G(s)H(s) = \frac{12}{(s+1)(s+2)(s+3)}$. (08 Marks)
- b. For a system with open loop T.F. $G(s)H(s) = \frac{1}{s(1+2s)(1+s)}$. Comment on stability of the system by Nyquist plot. Also find gain margin in dB. (08 Marks)

Module-5

- 9 a. Explain series and feed back compensation with block diagrams. (08 Marks)
- b. Write note on gain and phase cross over frequency gain and phase margin in polar plot. (08 Marks)

OR

- 10 a. Define the terms: i) State ii) State variables iii) State vector iv) State space. (08 Marks)
- b. Determine the state controllability and observability of the system described by

$$\dot{x} = \begin{bmatrix} -3 & 1 & 1 \\ -1 & 0 & 1 \\ 0 & 0 & 1 \end{bmatrix} x + \begin{bmatrix} 0 & 1 \\ 0 & 0 \\ 2 & 1 \end{bmatrix} u \quad y = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 1 & 0 \end{bmatrix} x$$
